

junction boxes & contractor range


A first class range of essential wiring accessories
required for any installation



Junction Boxes



Metal Boxes



Accessories



Junction Boxes	3
Connection Covers	4
Fuses	4
Steel Knockout Boxes	5
Grommets	5
Flex Connectors	6
Connector Strips	6
Cable Clips	7
Earthing	8
Cable Ties	9
Cable Glands	11




Extended range of cable accessories

Junction Boxes


Cat No.	Description	Inner Carton	Outer Carton
Junction Boxes - Selective Entry			
603	3 way 30 amp 89mm diameter (3½") brown	10pks	100pks
603W	3 way 30 amp 89mm diameter (3½") white	10pks	100pks
604	4 way 20 amp 80mm diameter (3¼") brown	10pks	100pks
604W	4 way 20 amp 80mm diameter (3¼") white	10pks	100pks
606	6 way 20 amp 89mm diameter (3½") brown	10pks	100pks
606W	6 way 20 amp 89mm diameter (3½") white	10pks	100pks

- Manufactured to BS EN 60670
- Selective entries indicated by numbers and symbols on rotating cover
- Moulded in brown or white urea
- Rear entry knockouts in base to facilitate ease of wiring
- Suitable for unbroken ring wire installations
- Lower lip of entries can easily be knocked out to take twin cables
- Robust, generous capacity slot terminals with large grub screws

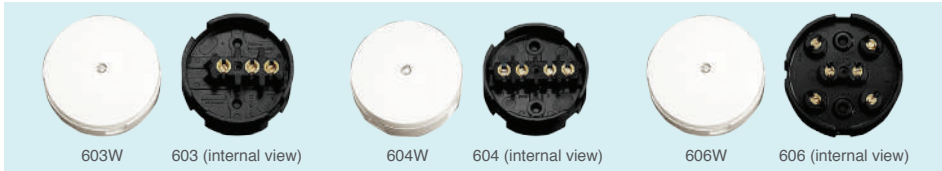

Junction Boxes - Knockout Entry			
491	4 way 20 amp 57mm diameter (2¼") brown	20pks	200pks
491W	4 way 20 amp 57mm diameter (2¼") white	20pks	200pks

- Manufactured to BS EN 60670
- Suitable for unbroken ring wire installations
- Robust, generous capacity slot terminals with large grub screws
- Small and unobtrusive
- Moulded in brown or white urea

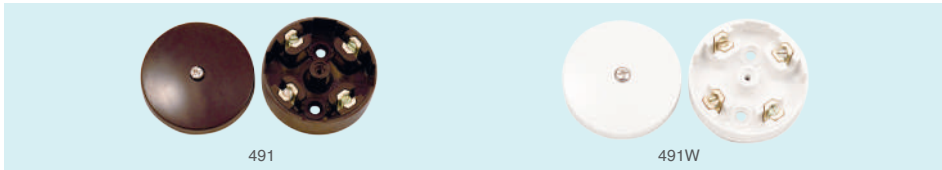

Junction Boxes - Heavy Duty			
4100SP	3 way 100 amp single pole	10pks	100pks
4100DP	3 way 100 amp double pole	5pks	50pks
460	3 way 60 amp	5pks	50pks

- Manufactured to BS EN 60670
- Robust, generous capacity slot terminals with large grub screws
- Moulded in brown urea
- High amperage connector blocks
- Brass terminal block
- Approved to VDE 0606



4 Junction Boxes


Cat No.	Description	Inner Carton	Outer Carton
Junction Boxes - Lighting			
403	3 way 3 amp	20pks	200pks
405	3 way 5 amp	20pks	200pks
410	3 way 10 amp	20pks	200pks



- Manufactured to BS 5733
- Approved BS EN 60998 terminal block
- Mounting holes for horizontal and vertical fixing
- Ideal for use in lighting applications
- Small and unobtrusive
- Approved to VDE 0606

Connection Cover

401M	Master, suitable for 4-way terminal block *	20pks	200pks
401S	Slave, suitable for 3-way terminal block *	28pks	280pks

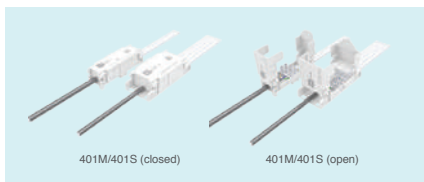

- For use with terminal strips up to 30 amp
- 3 part, easy assemble connection cover
- Auto cable restraint - 75% quicker to install than similar products
- V2 fire rating
- Supplied in a counter display carton
- White colour for ease of location in areas of low light
- Made in the UK from reclaimed materials
- Conforms to all relevant local and national regulations
- * terminal strips not included

Easy to Install



Step 1
Remove lids

Step 2
Place electrical connection on to base

Step 3
Insert lids

Step 4
Close lid A & hold in position whilst closing lid B

Step 5
Clip the lid shut. Use optional screw if required

Fuses - Bulk Pack

F103	3 amp in packs of 10	10pks	100pks
F105	5 amp in packs of 10	10pks	100pks
F1010	10 amp in packs of 10	10pks	100pks
F1013	13 amp in packs of 10	10pks	100pks

- Manufactured to BS 1362



Mounting Boxes

Cat No.	Description	Inner Carton	Outer Carton
Dry Lining Boxes			
907	1 gang 35mm	10pks	100pks
908	2 gang 35mm	5pks	50pks
916	Dual 35mm	5pks	50pks
917	1 gang 47mm	10pks	100pks
918	2 gang 47mm	5pks	50pks
919	Round 35mm	10pks	100pks
920	Triple 35mm, 1 and 2 gang	5pks	50pks
907FP	1 gang 35mm with intumescent gasket	10pks	100pks
908FP	2 gang 35mm with intumescent gasket	5pks	50pks
916FP	Dual 35mm with intumescent gasket	5pks	50pks
917FP	1 gang 47mm with intumescent gasket	10pks	100pks
918FP	2 gang 47mm with intumescent gasket	5pks	50pks



- Manufactured to BS 5733

Intumescent Gasket:

- Meets the 17th edition IEE & Document B of the UK Building Regulations
- Expands in a fire to act as a fully resistant fire barrier

Steel Knockout Boxes			
HGS01	1 gang 16mm (20 pcs per pack)	20pks	200pks
HGS02	1 gang 25mm (10 pcs per pack)	10pks	100pks
HGS03	1 gang 35mm (10 pcs per pack)	10pks	100pks
HGS04	2 gang 25mm (5 pcs per pack)	5pks	100pks
HGS05	2 gang 35mm (5 pcs per pack)	5pks	50pks
HGS06	1 gang 47mm (10 pcs per pack)	10pks	100pks
HGS07	2 gang 47mm (5 pcs per pack)	5pks	50pks
HGS07/C2	2 x 2 gang 47mm - Combination plate	5pks	-
HGS07/C4	4 x 2 gang 47mm - Combination plate	5pks	-
HGS08	Dual 35mm (5 pcs per pack)	5pks	50pks



- Manufactured to BS EN 60670-1

Cat No.	Description	Pack Quantity	Inner Carton	Outer Carton
Grommets				
GRRB20O/100	20mm Open	100	2pks	20pks
GRRB25O/100	25mm Open	100	2pks	20pks
GRRB20C/100	20mm Closed	100	2pks	20pks
GRRB25C/100	25mm Closed	100	2pks	20pks



- Manufactured from PVC
- Chemical resistant
- Suitable for internal or external use
- Protects cable entry into metal boxes with sharp edges
- Easy to fit.

Contractor Range

Cat No.	Description	Inner Carton	Outer Carton
452	10A, 3-pin shrouded non-reversible male and female	20pks	200pks
458	13A, 3-pin solid brass block through terminals	20pks	200pks



- Manufactured to BS 5733
- 2 plastic cable restraints retained by plated-steel slotted head screws
- Brass slotted head terminal screws

Cat No.	Description	Pack Quantity	Inner Carton	Outer Carton
Connector Strips				
TS2.5/12/10	2.5A 12 way	10	-	100pks
TS5/12/10	5A 12 way	10	-	100pks
TS15/12/10	15A 12 way	10	-	50pks
TS30/12/10	30A 12 way	10	-	30pks
TS60/12/10	60A 12 way	10	-	20pks

- Manufactured from thermoplastic
- Unique 'snap-off' spine design
- Maximum continuous temperature rating 80°C
- Nominal voltage 400V
- Fully backed-out screws to speed installations
- Manufactured to BS EN 60998-2-1



Cat No.	Description	Colour	Pack Quantity	Inner Carton	Outer Carton
Adaptable Boxes with Knockouts					
ADG1K/1	75 x 75 x 50mm Knockouts	Galvanised	1	-	80pks
ADB1K/5	75 x 75 x 50mm Knockouts	Black	5	-	80pks
ADG2K/1	100 x 100 x 37.5mm Knockouts	Galvanised	1	-	60pks
ADB2K/5	100 x 100 x 37.5mm Knockouts	Black	5	-	60pks
ADG3K/1	100 x 100 x 50mm Knockouts	Galvanised	1	-	60pks
ADB3K/5	100 x 100 x 50mm Knockouts	Black	5	-	60pks
ADG3P/1	100 x 100 x 50mm Plain	Galvanised	1	-	60pks
ADB3P/5	100 x 100 x 50mm Plain	Black	5	-	60pks
ADG4K/1	150 x 100 x 50mm Knockouts	Galvanised	1	-	45pks
ADB4K/5	150 x 100 x 50mm Knockouts	Black	5	-	45pks



- Manufactured to IEC 60670-1
- Steel boxes finished in pre-galvanised or black epoxy polyester
- 20mm Knockouts
- High strength
- Easy to use

Cat No.	Description	Colour	Pack Quantity	Inner Carton	Outer Carton
Twin & Earth Cable Clips					
CCF1/100	T & E 1mm	Grey	100	-	7200pks
CCF1.5/100	T & E 1.5mm	Grey	100	-	7200pks
CCF2.5/100	T & E 2.5mm	Grey	100	-	7200pks
CCF4/100	T & E 4mm	Grey	100	-	7200pks
CCF6/100	T & E 6mm	Grey	100	-	7200pks
CCF10/100	T & E 10mm	Grey	100	-	3600pks



- For fast installations of cables
- Made from impact resistant UV stabilised polypropylene
- Can withstand high impact together with extremes of heat, cold and acid
- Safety nail bends before breaking - hardened and zinc coated
- Temperature range -40°C to +80°C

Round Cable Clips					
CCR5/100	Round 5mm	White	100	-	7200pks
CCR6/100	Round 6mm	White	100	-	7200pks
CCR7/100	Round 7mm	White	100	-	7200pks
CCR7B/100	Round 7mm	Black	100	-	7200pks
CCR7BR/100	Round 7mm	Brown	100	-	7200pks
CCR8/100	Round 8mm	White	100	-	7200pks
CCR10/100	Round 10mm	White	100	-	3600pks



- For fast installations of cables
- Made from impact resistant UV stabilised polypropylene
- Can withstand high impact together with extremes of heat, cold and acid
- Safety nail bends before breaking - hardened and zinc coated
- Temperature range -40°C to +80°C
- Moulded in quality virgin material

Cat No.	Description	Pack Quantity	Inner Carton	Outer Carton
Bell Wire Clips				
CCBELL/100	Bell Wire Clips	100	-	2400pks



- For fast installations of cables
- Made from impact resistant UV stabilised polypropylene
- Can withstand high impact together with extremes of heat, cold and acid
- Safety nail bends before breaking - hardened and zinc coated
- Temperature range -40°C to +80°C

Contractor Range

Cat No.	Description	Colour	Inner Carton	Outer Carton
Earth Clamps				
EC141	Internal 12-32mm	Red	20pks	200pks
EC151	External 12-32mm	Blue	20pks	200pks
EC161	Internal/External 12-32mm	Green	20pks	200pks



- Terminal size A-D (2.5mm²-10mm²)
- Maximum earth conductor 1 x 10mm²
- Comply with BS 951

Cat No.	Description	Pack Quantity	Inner Carton	Outer Carton
Earth Rod				
ERT3/8/4FT/1	3/8" 4ft / 1.2 Metre	1	-	50pks
ERT5/8/4FT/1	5/8" 4ft / 1.2 Metre	1	-	20pks




- ERT3/8/4FT/1-01 3/8" Unthreaded copperbond rod and lug clamp (M8 bolt size)
- Manufactured by molecularly bonding 99.9% pure electrolytic copper onto a low carbon steel core
- Highly resistant to corrosion
- Due to the tensile strength, can be driven by power hammers to great depths
- High strength
- ERT5/8/4FT 5/8" Threaded copperbond rod
- Conforms to ISO 9001:2008

Earth Rod Accessories				
ERTC5/8/1	5/8" Earth Rod Clamp	1	30pks	300pks
ERTC3/8LUG/1	3/8" Rod to Lug Clamp	1	25pks	250pks
ERTC5/8LUG/1	5/8" Rod to Lug Clamp	1	10pks	100pks
ERTC58/1	5/8" Coupler	1	20pks	100pks
ERTD55/8/1	5/8" Driving Stud	1	20pks	100pks




- Conductor Range: 25 x 12mm Tape Max.
- BS EN SC164-1
- High corrosion resistance
- High strength
- Conforms to ISO 9001:2008
- ERTC3/8LUG/1 + ERTC5/8LUG/1-01 Type C Rod to lug clamp

Cat No.	Description	Colour	Pack Quantity	Inner Carton	Outer Carton
Cable Ties					
CT100X2.5B/100	L 100mm W 2.5mm	Black	100	-	250pks
CT100X2.5N/100	L 100mm W 2.5mm	Natural	100	-	250pks
CT150X3.8B/100	L 150mm W 3.8mm	Black	100	-	200pks
CT150X3.8N/100	L 150mm W 3.8mm	Natural	100	-	200pks
CT200X2.5N/100	L 200mm W 2.5mm	Natural	100	-	200pks
CT200X4.8B/100	L 200mm W 4.8mm	Black	100	-	100pks
CT200X4.8N/100	L 200mm W 4.8mm	Natural	100	-	100pks
CT200X4.8R/100	L 200mm W 4.8mm	Red	100	-	100pks
CT300X4.8B/100	L 300mm W 4.8mm	Black	100	-	50pks
CT300X4.8N/100	L 300mm W 4.8mm	Natural	100	-	50pks
CT300X4.8R/100	L 300mm W 4.8mm	Red	100	-	50pks
CT370X4.8B/100	L 370mm W 4.8mm	Black	100	-	50pks
CT370X4.8N/100	L 370mm W 4.8mm	Natural	100	-	50pks
CT370X7.6B/100	L 370mm W 7.6mm	Black	100	-	40pks
CT450X8B/100	L 450mm W 8mm	Black	100	-	30pks
CTSMW/100	Small Cable Tie Mount	Natural	100	-	100pks
CTLMW/100	Large Cable Tie Mount	Natural	100	-	100pks

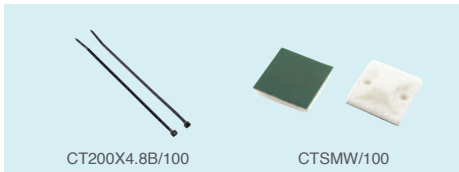

- Nylon (PA66) cable ties
- Quick and easy to install with high locking & tensile strength
- Continuous operating temperature -40°C to +85°C
- Halogen free, LSF (Low Smoke & Fume)

Insulation Tape					
EITB33/8	19mm x 33m Reel - Multipack	Black	8	4pks	16pks
EITBL33/8	19mm x 33m Reel - Multipack	Blue	8	4pks	16pks
EITBR33/8	19mm x 33m Reel - Multipack	Brown	8	4pks	16pks
EITYG33/8	19mm x 33m Reel - Multipack	Green/Yellow	8	4pks	16pks
EITY33/8	19mm x 33m Reel - Multipack	Yellow	8	4pks	16pks
EITW33/8	19mm x 33m Reel - Multipack	White	8	4pks	16pks
EITR33/8	19mm x 33m Reel - Multipack	Red	8	4pks	16pks
UMT365/1	Underground Marker Tape 150mm x 365m Reel	Yellow	1	-	8pks

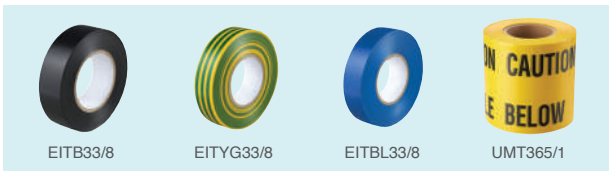

- Tape Manufactured to BS 60454
- Flame retardant PVC
- Strong and durable

Cat No.	Description	Pack Quantity	Inner Carton	Outer Carton
BW Brass Armoured Cable Gland Kits				
CGABWIS20(S)/2	BW Range Indoor Standard 20(S)mm	2	30pks	150pks
CGABWIS20/2	BW Range Indoor Standard 20mm	2	25pks	125pks
CGABWIS25/2	BW Range Indoor Standard 25mm	2	15pks	75pks
CGABWIS32/2	BW Range Indoor Standard 32mm	2	10pks	50pks
CGABWIS40/1	BW Range Indoor Standard 40mm	1	10pks	50pks
CGABWIS50/1	BW Range Indoor Standard 50mm	1	8pks	40pks
CGABWIS63/1	BW Range Indoor Standard 63mm	1	5pks	25pks
CGABWIL20(S)/2	BW Range Indoor LSF 20(S)mm	2	30pks	150pks
CGABWIL20/2	BW Range Indoor LSF 20mm	2	25pks	125pks
CGABWIL25/2	BW Range Indoor LSF 25mm	2	15pks	75pks
CGABWIL32/2	BW Range Indoor LSF 32mm	2	10pks	50pks
CGABWIL40/1	BW Range Indoor LSF 40mm	1	10pks	50pks
CGABWIL50/1	BW Range Indoor LSF 50mm	1	8pks	40pks
CGABWIL63/1	BW Range Indoor LSF 63mm	1	5pks	25pks



CGABWIS20/2

- Brass 2 part indoor gland kit
- Suitable for all types of steel wire armoured cable (SWA)
- Provides mechanical cable retention and electrical continuity via armour wire termination
- Available with PVC or LSF shroud
- Manufactured to BS 6121-1-2005
- IP2X EN 60529
- Operating Temperature: -80°C to +300°C
- Pack Contents: Gland(s), steel locknut(s), earth tag(s), shroud(s)

CW Brass Armoured Cable Gland Kits				
CGACWOS20(S)/2	CW Range Outdoor Standard 20(S)mm	2	20pks	100pks
CGACWOS20/2	CW Range Outdoor Standard 20mm	2	15pks	75pks
CGACWOS25/2	CW Range Outdoor Standard 25mm	2	10pks	50pks
CGACWOS32/2	CW Range Outdoor Standard 32mm	2	5pks	25pks
CGACWOS40/1	CW Range Outdoor Standard 40mm	1	10pks	50pks
CGACWOS50/1	CW Range Outdoor Standard 50mm	1	5pks	25pks
CGACWOS63/1	CW Range Outdoor Standard 63mm	1	4pks	20pks
CGACWOL20(S)/2	CW Range Outdoor LSF 20(S)mm	2	20pks	100pks
CGACWOL20/2	CW Range Outdoor LSF 20mm	2	15pks	75pks
CGACWOL25/2	CW Range Outdoor LSF 25mm	2	10pks	50pks
CGACWOL32/2	CW Range Outdoor LSF 32mm	2	5pks	25pks
CGACWOL40/1	CW Range Outdoor LSF 40mm	1	10pks	50pks
CGACWOL50/1	CW Range Outdoor LSF 50mm	1	5pks	25pks
CGACWOL63/1	CW Range Outdoor LSF 63mm	1	4pks	20pks



CGACWOS20/2

- Brass 4 part indoor & outdoor gland kit
- Suitable for all types of steel wire armoured cable (SWA)
- Provides mechanical cable retention and electrical continuity via armour wire termination
- Provides an environmental seal on cable outer sheath.
- Available with PVC or LSF shroud
- Manufactured to BS 6121-1-2005
- IP66 EN 60529
- Operating Temperature: -20°C to +80°C
- Pack Contents: Gland(s), steel locknut(s), earth tag(s), shroud(s)

CXT Brass Armoured Cable Gland Kits				
CGACXT20(S)/2	Industrial CXT 20(S)mm	2	25pks	125pks
CGACXT20/2	Industrial CXT 20mm	2	20pks	100pks
CGACXT25/2	Industrial CXT 25mm	2	15pks	75pks



CGACXT20/2

- Brass indoor & outdoor gland kit
- Suitable for braided Shielded Flex (SY), Screened Flex (CY) or Unscreened Flex (YY) cable
- Provides an environmental seal on cable outer sheath.
- Internal mechanical retention of wire braid for electrical continuity
- Manufactured to BS 6121-1-2005
- IP66 EN 60529
- Operating Temperature: -20°C to +80°C
- Pack Contents: Gland(s), steel locknut(s), washer(s), shroud(s)

Cat No.	Description	Material	Cable Acceptance	Carton
Cable Glands				
CPRGPF20S	Grey Plastic Gland Kit for 1-1.5mm flat cable c/w Flat Cable Insert, Locknut	Polyamide	1-1.5mm ² Flat Cable	40
CPRGPF20	Grey Plastic Gland Kit for 2.5-4mm flat cable c/w Flat Cable Insert, Locknut	Polyamide	2.5-4mm ² Flat Cable	40
CPRGPF252	Grey Plastic Gland Kit for 2x2.5mm flat cable c/w Flat Cable Insert, Locknut, Adaptor	Polyamide	2x 2.5mm ² Flat Cable	40
CPRGPF25	Grey Plastic Gland Kit for 6mm flat cable c/w Flat Cable Insert, Locknut, Adaptor	Polyamide	6mm ² Flat Cable	30
CPRGPF32	Grey Plastic Gland Kit for 10-16mm flat cable c/w Flat Cable Insert, Locknut	Polyamide	10-16mm ² Flat Cable	30
CPRGPT40	Grey Plastic Tails Kit. c/w, Multiple Inserts, Locknut, Blanking insert	Polyamide	2x 25mm ² + 1x 16mm ²	30
CPRGPT40A	Grey Plastic Tails Kit. c/w Adaptor, Multiple Inserts, Locknut, Blanking insert	Polyamide	2x 25mm ² + 1x 16mm ² + Adaptor	40
CPRGBF20S	Brass Gland Kit for 1-1.5mm flat cable c/w Flat Cable Insert, Locknut	Nickel Plated Brass	1-1.5mm ² Flat Cable	40
CPRGBF20	Brass Gland Kit for 2.5-4mm flat cable c/w Flat Cable Insert, Locknut	Nickel Plated Brass	2.5-4mm ² Flat Cable	40
CPRGBF252	Brass Gland Kit for 2x2.5mm flat cable c/w Flat Cable Insert, Locknut, Reducer	Nickel Plated Brass	2x 2.5mm ² Flat Cable	40
CPRGBF25	Brass Gland Kit for 6mm flat cable c/w Flat Cable Insert, Locknut, Reducer	Nickel Plated Brass	6mm ² Flat Cable	40
CPRGBF32	Brass Gland Kit for 10-16mm flat cable c/w Flat Cable Insert, Locknut	Nickel Plated Brass	10-16mm ² Flat Cable	30
CPRGBT40	Brass Tails Kit. c/w Multiple Inserts, Locknut, Blanking insert	Nickel Plated Brass	2x 25mm ² + 1x 16mm ²	30
CPRGBT40A	Brass Tails Kit. c/w Adaptor, Multiple Inserts, Locknut, Blanking insert	Nickel Plated Brass	2x 25mm ² + 1x 16mm ² + Adaptor	30
CPRGPT32	Grey Plastic Tails Kit. c/w Multiple Inserts, Locknut, Blanking insert	Polyamide	2x 16mm ² + 1x 16mm ²	30
CPRGBT32	Brass Tails Kit. c/w, Multiple Inserts, Locknut, Blanking insert	Nickel Plated Brass	2x 16mm ² + 1x 16mm ²	30
CPRGMGR	10x M20, 3x M32 Semi Blind Grommets	TPE, Flame Retardant	1 - 25mm ²	10

Ideal for use with metal consumer units

- Both Plastic and Brass Glands acceptable, due to no set regulation on cable entry
- Tails Glands allow 2 x tails and 1 x earth cable to enter one single entry, whilst being individually sealed
- No Eddy currents
- Earth cable entry can be easily blanked
- All Glands/Grommets satisfy IP4X (minimum requirement as

per NICEIC Guidelines for all cable entry and exit on horizontal planes)

- Cable Retention, negates requirement for additional tails clamp
- All products are self-extinguishing
- Glands are vibration resistant
- Halogen Free Material



Gland Selection Chart

Cat No.	Description	Colour	Pack Quantity	Inner Carton	Outer Carton
Compression Glands					
CGND20B/10	7-10mm Ø20mm	Black	10	20pks	200pks
CGND20W/10	7-10mm Ø20mm	White	10	20pks	200pks
CGND20R/10	7-10mm Ø20mm	Red	10	20pks	200pks
CGND25B/10	8-13mm Ø25mm	Black	10	20pks	200pks
CGND25W/10	8-13mm Ø25mm	White	10	20pks	200pks
CGND25R/10	8-13mm Ø25mm	Red	10	20pks	200pks



- UL + VDE Approved
- IP68 rated
- Temperature resistance -35°C to +80°C
- Dome Top
- Complete with locknut

Nominal Conductor Area mm ²	1	2	3	4	5	7	10	12	19	27	37	48
--	---	---	---	---	---	---	----	----	----	----	----	----

Cable Gland Selector Chart - Armoured Cable Gland Kits

1.5	-	20S	20S	20S	20S	20S	20	20/25	25	25/32	32	32/40
2.5	-	20S	20S	20S	20	20	25	25	25/32	32	32/40	40
4	-	20S	20S/20	20	20	20/25	25	25/32	32	40	-	-
6	-	20S/20	20S/20	20	-	-	-	-	-	-	-	-
10	-	20/25	20/25	25	-	-	-	-	-	-	-	-
16	-	20/25	25	25/32	-	-	-	-	-	-	-	-
25	-	25	25/32	32	-	-	-	-	-	-	-	-
35	-	32	32	32	-	-	-	-	-	-	-	-
50	20	25	32	32	-	-	-	-	-	-	-	-
70	20/25	32	32	40	-	-	-	-	-	-	-	-
95	25	32	40	40/50S	-	-	-	-	-	-	-	-
120	25	40	40/50S	50S/50	-	-	-	-	-	-	-	-
150	32	40	50S/50	50	-	-	-	-	-	-	-	-
185	32	50S	50S/50	63S	-	-	-	-	-	-	-	-
240	32/40	50/50S	50/63S	63	-	-	-	-	-	-	-	-
300	40	50/63S	63S/63	75S	-	-	-	-	-	-	-	-
400	40/50S	63S	63/75S	75	-	-	-	-	-	-	-	-

Gland size CXT	Cable Diameter	
	Min	Max

Armoured Cable Gland

20S	6.1	11.7
20	6.5	14
25	11.1	20



Notes:

Notes:

Notes:

Head Office

Email: info@luceco.com

Luceco Ltd
Caparo House,
103 Baker Street, London,
United Kingdom, W1U 6LN

UK:

Tel: +44 (0) 1952 238 100
Fax: +44 (0) 1952 238 180
Email: sales@luceco.com

Nexus Industries Ltd
Nexus Distribution Centre
Stafford Park 1, Telford,
Shropshire, England, TF3 3BD

Germany:

Tel: +49 40 89066 8780
Fax: +49 40 89066 87829
Email: eu_sales@nexusinds.com

Nexus Industries GmbH
Holstenplatz 20b
22765 Hamburg, Germany

France:

Tel: +33 (0)7 88 29 56 59
Fax: +33 (0)1 5731 74 19
Email: fr_sales@nexusinds.com

Nexus Industries SAS
France & Belux
3 Rue de Courtaïn
Magny Le Hongre 77700
FRANCE & BELUX

Italy:

Tel: +39 0434 1696795
Fax: +39 0434 1696795
Email: it_sales@nexusinds.com

Nexus Italia, Via Amman 10
33170 Pordenone, Italy

Spain:

Tel: +34 93 829 55 75
Email: sp_sales@nexusinds.com

Nexus Industries LTD
C/ Bobinadora 1-5
08302 Mataró
Barcelona (SPAIN)

Middle East:

Tel: +971 4 609 1867
Fax: +971 4 609 1868
Email: mea_sales@
nexusinds.com

Luceco Middle East FZE
Bldg. 5EB, Office 342,
PO Box 371128, DAFZA,
Dubai, UAE.

Asia Pacific:

Tel: +86 (0) 573 8357 0200
Fax: +86 (0) 573 8357 0248
Email: asia_sales@nexusinds.cn

No 1438, Jiachuang Road,
Xiuzhou Industrial Park, Jiaxing,
Zhejiang, China, P.C. 314031

North & South America:

Tel: +1 281 978 2509
Fax: +1 281 466 4620
Email: us_sales@luceco.com

Luceco Inc
11050 West Little York Road
Building C-2, Houston, Texas,
USA 77041

Africa:

Tel: +27 11 432 6779
Fax: +27 86 219 2099
Email: africa_sales@nexusinds.com

Unit 2, Cedar Wood Office Park
Cnr. Western Service and
Mount Lebanon Road Woodmead
South Africa, 2144

LUCECO

a Luceco Ltd. Group company



LUCECO

www.bgelectrical.uk