

Designed for wall application in commercial or industrial environments.

**Characteristics**


**Can be fitted up to a height of 10 metres.**  
High performance tangential propeller/impeller giving a low sound level.  
Can be installed in series.

**Applications**

See page BASIC CONCEPTS AIR CURTAINS.





INSTALLATION HEIGHT

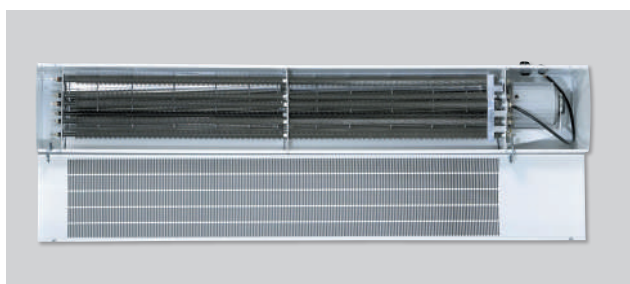

**Ease of installation**

Fitted with a removable cover up to 180° by means of a set of hinges to ease the wiring.

**DIMENSIONS (mm)**

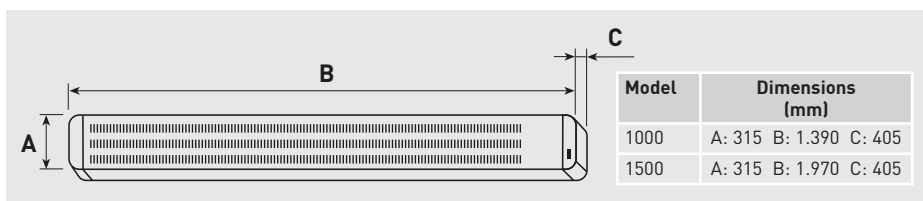

**ACCESSORIES**




**CR-20**

Each remote unit can control up to 5 units of the same model in series.  
LxWxH (mm): 80x57x120

Power selector and speed remote A	Air curtain model
CR-20	COR-IND 1000 F
	COR-IND 1500 F

**Air distance/speed**

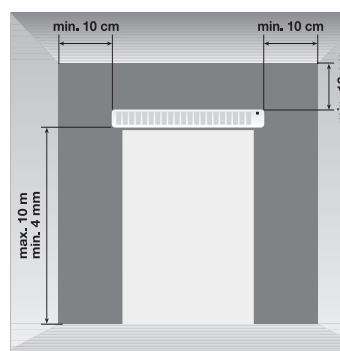

**Installation height**

**TECHNICAL CHARACTERISTICS**

Model	Voltage (50 Hz) (V)	Motor power (W)	Speeds	Airflow (m³/h)		Outout speed <sup>1</sup> at 0,05 m (m/s)	Sound pressure level <sup>2</sup> (dB(A))	Absorbed current (A)	Ambient/ Hot air	Weight (kg)	Colour
				Speed							
				High	Low						
COR-IND 1000 F	230	850	2	4.500	3.600	20	57	4	A	40	White RAL 9003
COR-IND 1500 F	230	1300	2	6.500	5.800	20	61	6	A	50	White RAL 9003

<sup>1</sup> Maximum airflow. Measured according to AMCA 220.  
<sup>2</sup> Measured at 5 meters, in free field.