inline connector

WORK POWER

ideal for power tools, DIY and workshop use

FEATURES

- Heavy duty construction
- 10A plug and socket connection block
- Includes cord grips
- Two pin (reversible) and three pin (non-reversible) options available
- Ideal for outdoor power tools and lighting

PRODUCT IMAGES

NC102B

NC102O

NC103B

NC103W

LINE DRAWING



NC102x



NC103x

PRODUCT INFORMATION

Part Number	NC102x, NC103x
Colour Options (x)	NC102x: Black (B), Orange (O)
	NC103x: Black (B), White (W)
Product Dimensions	NC102x: Height 24mm x Width 39.5mm x Depth 62.2mm (female), 61.7mm (male)
	NC103x: Height 24mm x Width 39.5mm x Depth 62.2mm (female), 63.7mm (male)

TECHNICAL SPECIFICATIONS

CE

Standard(s)	This product is certified to applicable British safety standards
	BS5733
Maximum Load (Wound)	10A: 2400 Watts, 240 Volts

IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN

SAFETY WARNING

PLEASE READ CAREFULLY AND USE IN ACCORDANCE WITH OUR SAFETY INSTRUCTIONS BELOW

Important: This connector has been designed specifically for use with Class II 'double insulated' equipment.

Warning: Total maximum load musts not exceed 10 amps (2400 Watts).

Ensure that the correct size cable is used (1.0mm is recommended).

This connector must not be used with appliances which require an earth connection.

Do not use this connector in damp or wet conditions.

1. Remove fixing nuts and bolts on both plug and socket, push inserts from sleeves.
2. Prepare the cable as shown in Figure 1.
3. Fit sleeves to cable before making connections. Sleeve marked 'CONNECT TO MAINS' must be on the mains supply side.
4. Sleeve marked 'CONNECT TO APPLIANCE' must be on the cable from the appliance or equipment.
5. Pass cable through the cord grip.
6. Wire plug and socket terminals as shown in Figure 2 and tighten screws securely.
7. Tighten cord grip securely over cable outer sheath. See Figure 2.
8. Reassemble iserts to sleeves then replace and tighten nuts and bolts.

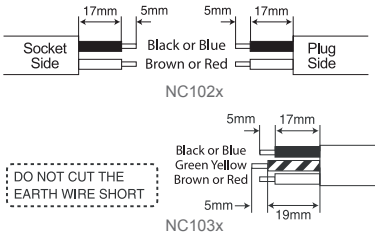

Fig 1.

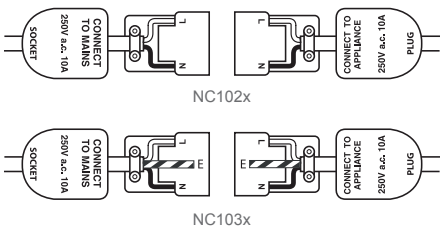

Fig 2.

Masterplug Help Line
03300 249 279

Supplied by
Luceco PLC
Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at
www.masterplug.com